
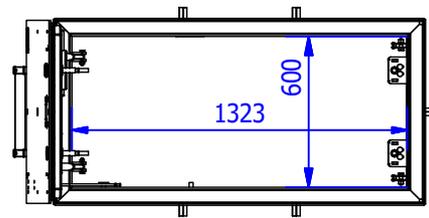





## Access covers

### TECHNICAL DATACARD

MANHOLE COVER 600 x 1300  
CLASS B125 / D400

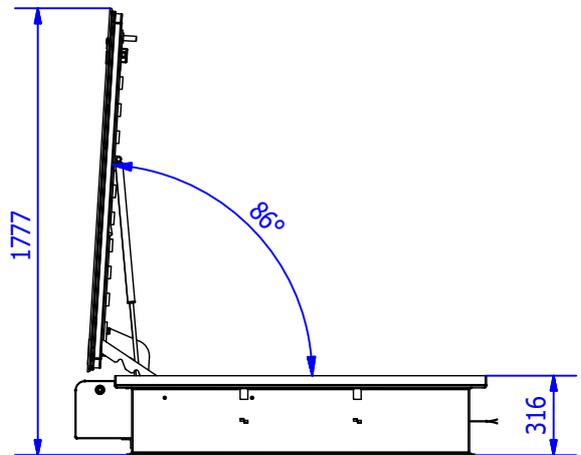

WIDTH	LENGTH	HEIGHT	ESTIMATED WEIGHT	FREE WIDE PASS
744 mm.	1623 mm.	316 mm.	288 kg.	600x1323 mm.
TYPE B125 / D400 - UNE-EN 124 / WATER-TIGHT.				
MADE OF CARBON STEEL S275JR/1.0044 AND TREATMENT ZINC Cr III + SEALED / CORROSION CATEGORY C4.				
SAFETY LOCK SCREW ALUMINUM BRONZE / WITH SAFETY KEY SPECIAL.				
TOP COVER SLIP EMBOSSED SHEET				
ADDITIONAL HELP FOR OPENING AND CLOSING BY A GAS ASSISTED SPRING DAMPERS.				
SECURITY SYSTEM WITH INTEGRATED ARRESTOR (INCORPORATED).				
OPTIONS:				
ATTACK-PROOF (SAFETY LOCK)				
CARBON STEEL MADE AND EPOXY PAINTED.				
SAFETY GUARD / ANTIFALL GUARD.				
ADAPTED TO CUSTOMERS REQUEST. (LOGOS AND DISTINCTIVE)				

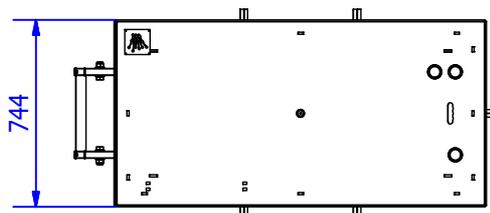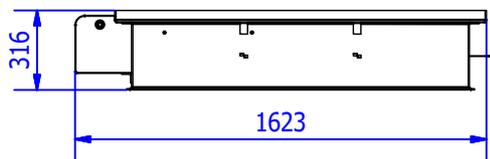

Approx. weight 288 kg.

## Access covers

### TECHNICAL DATACARD

MANHOLE COVER 600 x 1300

CLASS B125 / D400



- \* Approved vandal lock with coded security key.
- \* Optional: - Key Masterkeying.
- Customize by customer.



Approx. 309 kg., including defenses.



- \* Set access protection defenses built and solidarity entry to manhole cover.
- \* Consisting in a cage for man entry door, retracted inwards and side shields/fenders bolted on top.
- \* Manufactured in standard carbon steel epoxy painted.